

SPE-3000 SERIES

SPE-3000

- 省電易攜帶，操作簡便。
- 適用各類型操作場合。
- 提把與外殼一體成型。
- 均附有10呎線控裝置。
- 碳刷馬達，頻繁啟動耐操控。

電動油壓泵浦 Hydraulic Electric Pump

- ※ Requires less energy, simple and easy to operate.
- ※ Suitable for any industrial application.
- ※ Handle and casing built together.
- ※ Equipped with 10ft remote line.
- ※ Carbon brushless motor, working frequently.

SPE-3000 Series

Reservoir Capacity:
3000-6000c.c

Flow at rated pressure:
4-0.4 L

Motor Size:
0.37kW(0.5 hp)

Maximum Operating Pressure:
700 bar

電泵型號選擇：Custom build your Electric Pump:

SPE-3000A 1 5 1 LT PBG

1. 閥門樣式

- A. 常閉內建三口二位電磁閥：前進 保持 回復
B. 常開線控自動洩壓：前進 回復
(馬達停止即洩壓，適用於衝床(打孔機)、壓鑄機或切割時使用)
C. 手動三口二位控制閥：前進 保持 手動回復
D. 手動四口三位控制閥：前進 保持 手動回復

2. 電壓/安培

- 1=115V/7.5A
2=230V/2.8A

3. Hz

5=50/60Hz

4. 相數

1=1ph

5. 油箱

無字樣=3000c.c PU油箱
LT=8000c.c 鐵製油箱
★亦可依客戶訂製

6. 配件

PJ=壓力調整開關
PB=外部調壓閥
G=壓力錶

1. Valve

A. 3way/ 2position built-in Solenoid Valve :
Advance Hold Return

B. Remote Release Pressure :
Advance Return

(Ideal for punching, crimping and cutting)

C. 3way/ 2position Manual Valve :
Advance Hold Manual return

D. 4way/ 3position Manual Valve :
Advance Hold Manual return

2. Voltage/A

- 1=115V/7.5A
2=230V/2.8A

3. Hz

5=50/60Hz

4. Phase

1=1ph

5. Reservoir

No word=3000c.c PU reservoir
LT=8000c.c Iron reservoir

★ User can order suitable reservoir.

6. fitting

PJ=Pressure adjust switch
PB=Pressure adjuster
G=Pressure gauge



SPE-3000C



LT=鐵製油箱
Iron reservoir



PJ=壓力調整開關
Pressure Adjust Switch
Part No.:SPG-800-CE80



G=充油式壓力錶
Pressure Gauge



PB=調整開關
Pressure Adjuster Switch
Part No.:SPS-7A-700

控制閥 Control Valve



單動液壓千斤頂可選用3口2位式電磁閥(內建)或手動控制閥。
建議型號：SPE-3000A(電磁閥)或SPE-3000C(手動閥)



A single-acting cylinder must be powered by a pump with a 3-way solenoid (built-in) or manual valve.

Compare Model : SPE-3000APS (solenoid) or SPE-3000CPS (manual)



雙動液壓千斤頂必須搭配具4口閥門的液壓泵浦。
建議型號：SPE-3000D

A double-acting cylinder must be powered by a pump with a 4-way valve. Compare Model : SPE-3000D

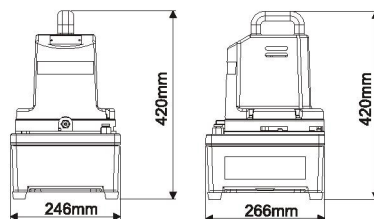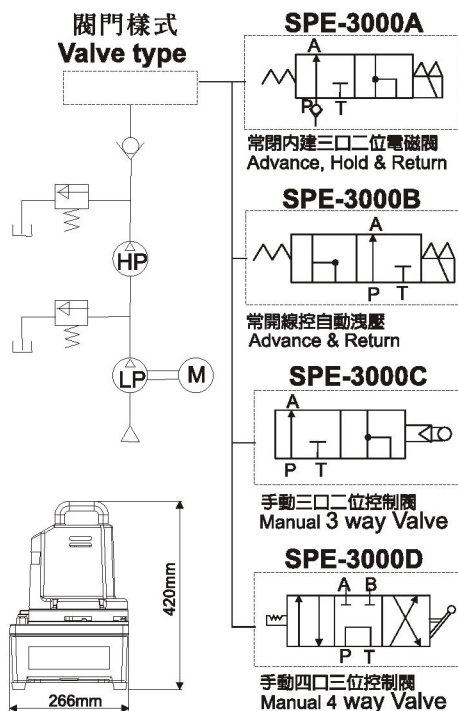

型號 Model Number	馬達 Motor	最大使用壓力 Max. Pressure	輸出壓力 Pressure Rating		輸出油量 Output flow rate		噪音值 dBA at Idle and 700bar	重量 (含油) Weight (include oil)	外型尺寸 Dimension
			1 st stage	2 nd stage	1 st stage	2 nd stage			
SPE-3000	0.37(0.5)	10,000(700)	200(14)	10,000(700)	4	0.4	85-90	16	250*270*400
SPE-3000 LT	0.37(0.5)	10,000(700)	200(14)	10,000(700)	4	0.4	85-90	24	300*350*460