


SPA-6 SERIES

SPA-6 氣動泵浦

- 內建釋放壓閥保護油路組件，空氣過濾器保護馬達。
- 鋁合金設計輕便高效率。
- 非拋棄式馬達經久耐用，減少維修成本。
- 永久性油箱蓋。
- 三位踏板控制液壓缸前進、持壓及回復操作。
- 已安裝空氣接頭，方便操作。
- SPA-6全系列於700bar壓力時噪音值為dBA 85，噪音低，適用範圍廣泛。



SPA-6 Pressure vs volume based on 700bar(10000psi) air pressure

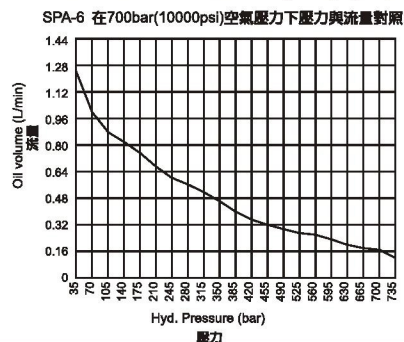

Air Hydraulic Pumps

- ※Internal relief valve protects circuit components, air inlet filter protects motor.
- ※High pressure output, light weight by Aluminum Alloy reservoir.
- ※Serviceable pump motor is not a "throw away", providing economical repair.
- ※Permanently vented reservoir cap.
- ※Three-position treadle provides cylinder advance, hold and retract operation.
- ※Equipped with air coupler, easy for using.
- ※dBA 85 at 700bar for all SPA-6 pumps, lower noise.



其他選配說明

假如您需加裝4口方向閥來操作雙動油壓缸，請依下列規範字尾增加編號。

加裝4口方向閥：型號D

案例：

SPA-6 選配4口方向閥，訂購型號改為 SPA-6D
相關技術實詢請與SUN RUN取得聯繫。

Optional Features





To add optional features to your pump, add the follow suffixes to the end of the model number.

4 ways control Valve : Model D

Example :

SPA-6 with 4 ways control valve, order: SPA-6D.

Technical specifications for these features are available from SUN RUN.

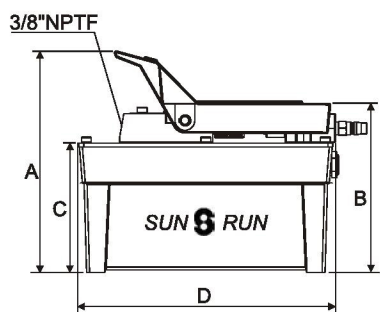

SPA-6D

型 號 Model Number	有效 儲油量 Usable Oil Capacity	輸出壓力 Pressure Rating		使用空壓 Air Pressure Range	輸出油量 Output Flow Rate (noload)		外型尺寸 Dimensions (mm)							重量 (含油) W.t (include oil)
							A	B	C	D	E	F	G	
		(L)	(bar)	(psi)	(kgf/cm ²)	(L/min)	0 bar	700bar						(kg)
SPA-6	1.8	700	10,000	6-10	1.2	0.16	225	171	131	260	128	228	102	8.2