


SPE-23TQ 電動油壓/扭力扳手泵浦


- 外部調壓及調速。
- 內置釋放閥保護裝置。
- 選配八孔1/4"口徑同步分流器(含公母快速接頭及防塵蓋)，可4組扳手同步作業。
- 馬達空轉可設定20、40、60秒後自動停止。
- 安全啓動裝置：停止後需再按啓動鈕才可使用。
- 停電時自動釋壓。
- 氣冷式油溫冷卻系統，油溫散熱效果強
- 高效能自動切換三段式流量。
- 標準配件24V遙控器。
- 可適用於各類扳手工具，尤其搭配SUN RUN油壓扳手展現最佳工作效率。
- 馬達“電機”控制，操作容易且具防錯插槽。

Hydraulic Electric/Torque Wrench Pump

- ※ External adjustable pressure regulator and speed.
- ※ Retract side internal relief valve protects tool.
- ※ Opt eight 1/4" ports (include female and male couplers with dust cap), that can synchronize work for 4 hydraulic wrench.
- ※ It can be set automatic stop moving as motor idle running till 20、40、60 seconds.
- ※ Safety start: After stopping, need to press another start button to continue.
- ※ Auto release pressure as no power.
- ※ Heat Exchanger Kit: Design air cooling to avoid pump overheating and costly repair from long work periods.
- ※ High Efficiency, Tri-speed automatic.
- ※ Standard 24V remote.
- ※ All-tool adjustability, regular ratchet tools or suit with SUN RUN hydraulic torque wrench for best performance.
- ※ Brushless motor control and prevent mistake design, more easy to work.

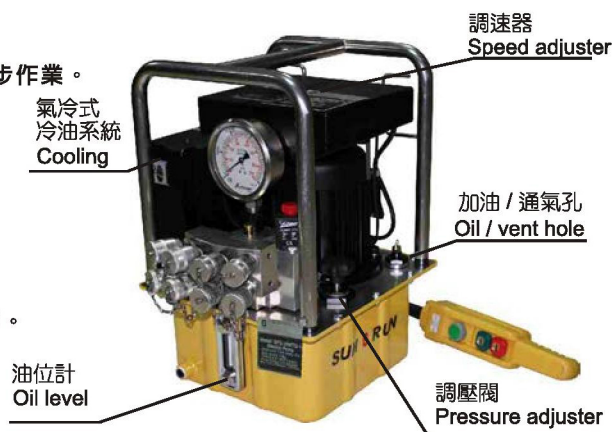


SPE-23TQ2815

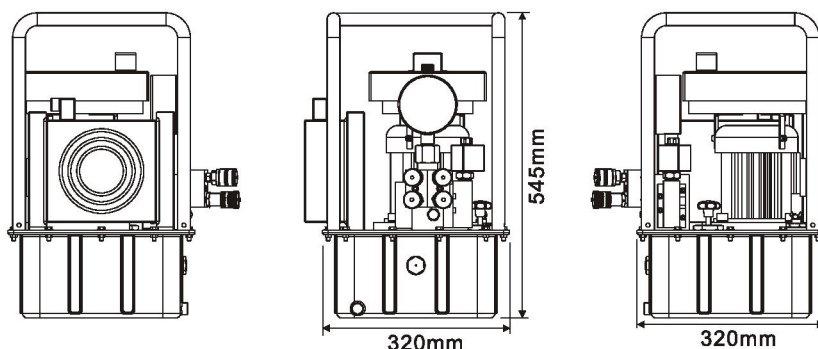

調速-扭力轉換表
Speed adjuster-torque
conversion chart

刻度值 Scale	扭力(N.m) Torque
40	3000
50	5000
60	8000
70	11000
80	16000
90	28000
100	35000

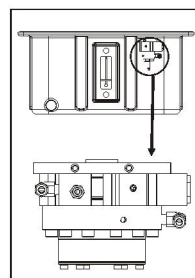

三段式流量切換閥
Tri-speed automatic

電泵型號選擇：Custom build your Electric/Torque Wrench Pump:

SPE-23TQ 2 5 1 5 2 0

0 1 2 3 4 5 6

0.樣式

TQ=扭力扳手專用

1.電壓

1=110V
2=230V

2.Hz

5=50Hz
6=60Hz

3.相數

1=單相

4.油箱 (Lx0.26=gal)

5=5L(1.3gal)
8=8L(2.1gal) 標準
★亦可依客戶訂製

5.多通閥(含1/4"公-母快速接頭)

1=1座及1公-1母快速接頭
2=1座及2公-2母快速接頭(標準件)
3=1座及3公-3母快速接頭
4=1座及4公-4母快速接頭

6.選配

W=輪子
O=冷卻系統
G=油壓錶

0.Type

TQ= just use in Torque Wrench

1.Voltage

1=110V
2=230V

2.Hz

5=50Hz
6=60Hz

3.Phase

1=single phase

4.Reservoir (Lx0.26=gal)

5=5L(1.3gal)
8=8L(2.1gal) Standard
★User can order suitable reservoir.

5.Manifold (include 1/4" male-female coupler)

1=1 manifold with 1 male and 1 female coupler
2=1 manifold with 2 male and 2 female couplers (standard)
3=1 manifold with 3 male and 3 female couplers
4=1 manifold with 4 male and 4 female couplers

6.Optional

W=Wheel
O=Cool system
G=Pressure Gauge

型號 Model Number	轉速 Rpm	噪音值 dBA at Idle and 700bar	馬達 Motor kW (hp)	安培 Amp at 700bar	流量 Flow rate @230VAC(L/min)			油箱 Oil tank (L)	重量 (含油) Weight (with oil) (kg)
					70 (bar)	400 (bar)	700 (bar)		
SPE-23TQ	2400	80	1.5 (2)	13 /230V	16	1.3	0.65	8	36.2