

SPE-2000RI- 電動油壓泵浦


- 採用高效能軸心活塞式泵浦，可有效於壓力變換時減少能量損失。
- 壓力開關及安全閥，雙安全機制預防超壓使用。
- 可外部調壓，出廠已預設壓力上限確保系統超荷使用。
- 附易讀值油位計。
- 全罩式散熱馬達，可適用於戶外操作環境。

High Pressure Hydraulic Electric Pump

- ※ Pump adopting a high-performance axial piston system and greatly reducing the change in the discharge volume caused by the pressure fluctuation.
- ※ Equipped with a double safe mechanism of the safety valve and the pressure switch to prevent an overload.
- ※ User adjustable external relief valve with a factory set upper limit prevents system overload.
- ※ Easy to read integrated oil level sight glass.
- ※ Totally enclosed fan-cooled motors are ideal for outdoor use in many environments.



選配
Optional



SPE-2000RI- Series

Reservoir Capacity:
22L

Flow at rated pressure:
0.35-1.08 L

Motor Size:
1.5、3.7kW (2、5 hp)

Maximum Operating Pressure:
2500 bar

電泵型號選擇：Custom build your Electric Pump:


SPE-2000RI5-2 6 3 20 3

- | | |
|---|--|
| 1. 馬達
2000RI2=2HP(1.5kw)
2000RI5=5HP(3.7kw) | 1. Voltage
2000RI2=2HP(1.5kw)
2000RI5=5HP(3.7kw) |
| 2. 電壓
2=220V-4P | 2. Voltage
2=220V |
| 3. Hz
5=50Hz
6=60Hz | 3. Hz
5=50Hz
6=60Hz |
| 4. 相數
3=3ph | 4. Phase
3=3ph |
| 5. 油箱
20=20L | 5. Reservoir
22=22L |
| 6. 閥門樣式
3=手動三口控制閥
4=手動四口控制閥 | 6. Valve
3=3way Manual Valve
4=4way Manual Valve |
| 7. 選配
C=線控裝置
W=輪子 | 7. Optional
C=Remote control
W=Wheel |

Model Number 型號	Motor 馬達 kW/(hp)	Insulation 絕緣	Flow Rate 輸出流量 (L/min)		Pressure Rating 輸出壓力 (bar)	Rpm 轉速		Weight (22L tank no oil) 重量 (kg)
			50Hz	60Hz		50Hz	60Hz	
SPE-2000RI2	1.5/(2)	E class Totally enclosed fan-cooled	0.35	0.42	2500	1500	1800	110
SPE-2000RI5	3.7/(5)	E級 全閉外扇	0.9	1.08				130

※ 型錄標示重量及尺寸為22L空油箱範例，其他油箱高度及重量依實品略有不同。
Product weight and reservoir high will be changed by different reservoir.
Catalog sample is 22L no oil reservoir.

電動泵浦基本閥型 BASIC PUMP VALVE	適用油壓缸 Used with cylinder		閥作用 Valve Function		
	●	●	●	●	●
手動三口方向閥 Manual 3 way Valve	●	●	●	●	●
手動四口方向閥 Manual 4 way Valve	●	●	●	●	●

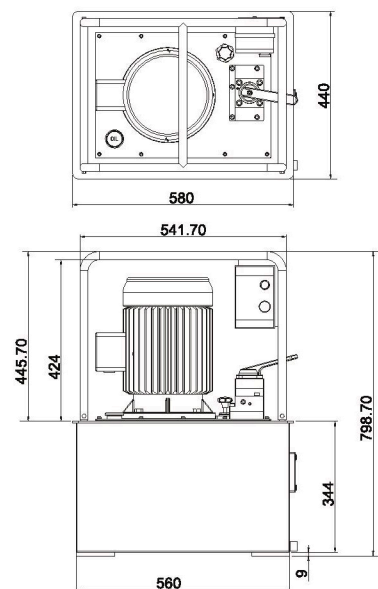

SPE-2000RI2-263223

