
SV/W ※單位 unit (mm)

手動操控閥

- 當油壓缸回縮時得以手動開啓方式使油流回油箱。
- 單動及雙動油壓缸均適用。

Manually Operated Check Valve

flow back to tank when cylinder retracts. and double acting cylinder.





SV-66

溢油孔:超過預設壓力時溢油 Overflow port: Overflow as over setting pressure. ➌ 76 P ≥ ○ C 20 85 57.7

單向逆止手動回油調節閥

- 當油壓缸回縮時得以手動開啓方式使油流回油箱。
- ●單動及雙動油壓缸均適用。

Manually Operated Check Valve


※ Valve is manually opened to allow oil to flow back to tank when cylinder retracts.

SV/W

Series

最大使用壓力 Maximum Operating Pressure

700 bar

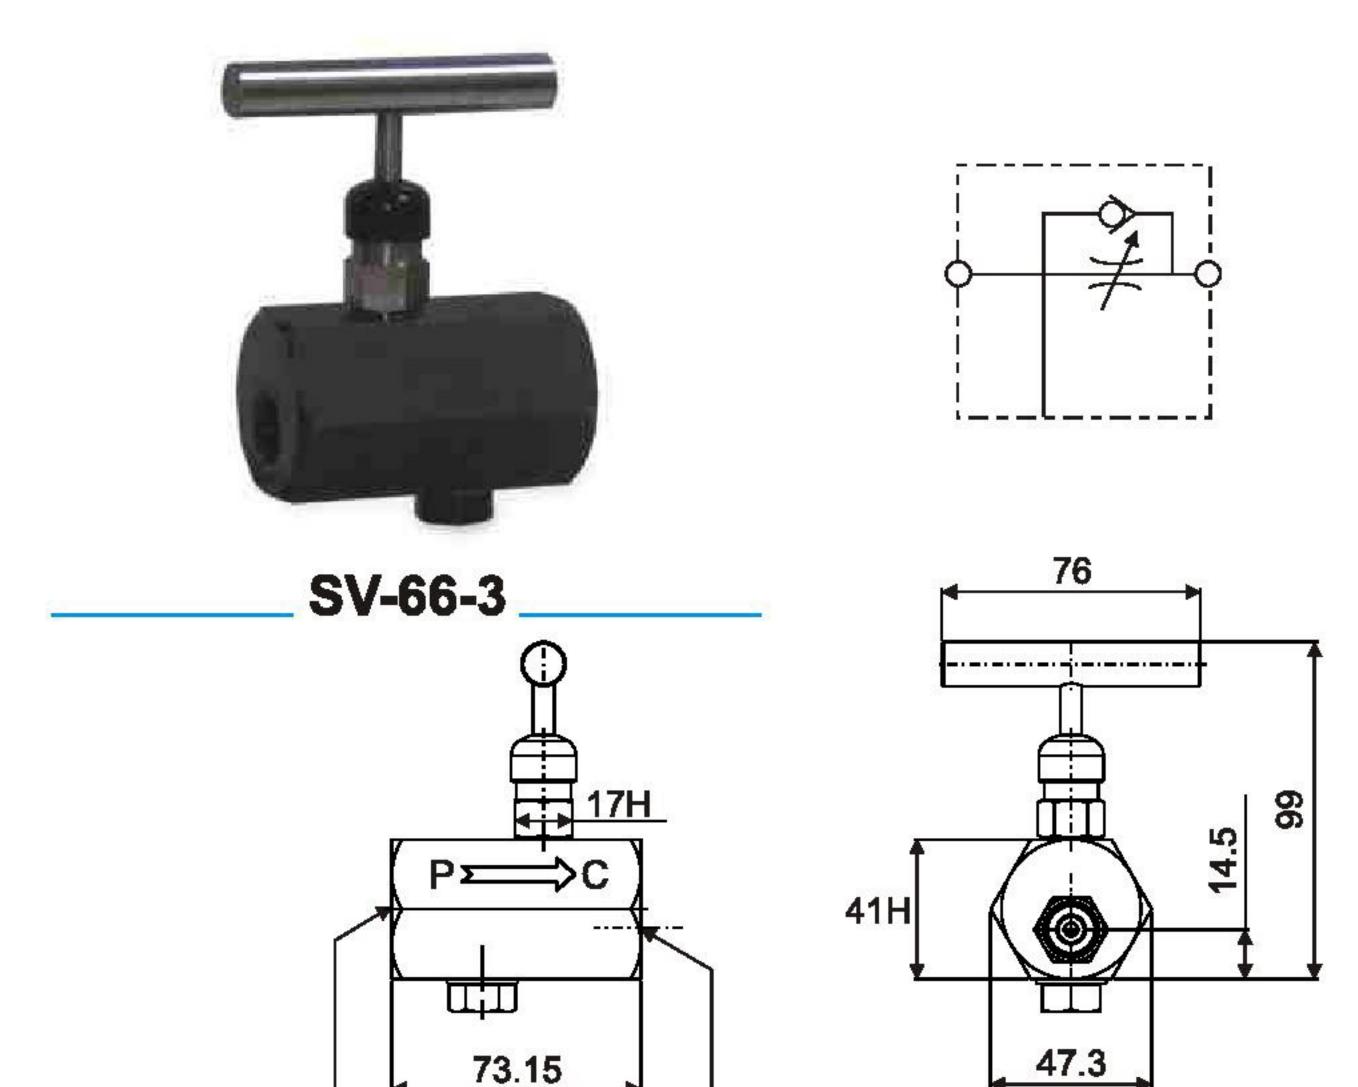

液控單向閥

3/8"-18 NPTF

- 當油壓系統壓力減少時,安裝於千斤頂可維持荷重。 ● 通常與雙動干斤頂搭配使用,承受自干斤頂上回油T型接頭的壓力。
- 3/8" NPTF 母接頭孔。
- 單向閥壓縮比 14% (6.5:1)

Pilot Operated Check Valve

※Can be mounted at the cylinder to hold the load in case of system pressure loss.


Normally used with double-acting cylinders where pilot port receives pressure from a T-fitting in the cylinder retract line.

※3/8" NPTF female ports.

※Pilot pressure ratio 14% (6.5:1)



SV-42

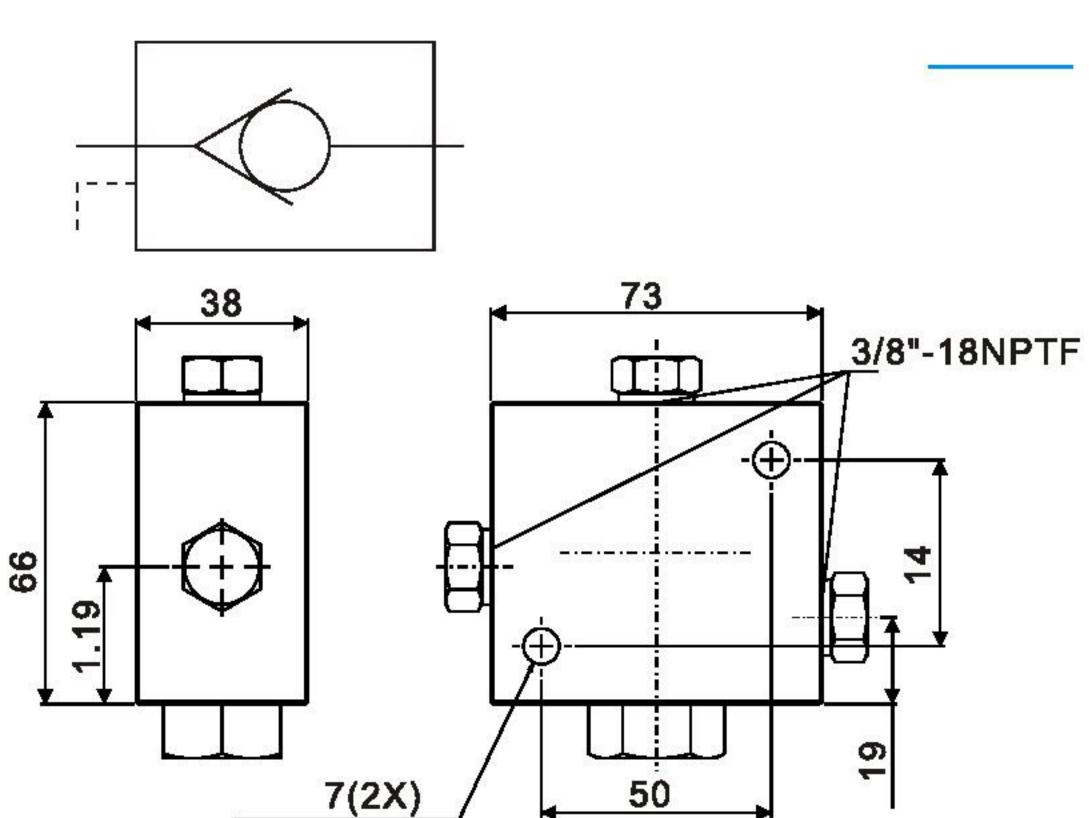


針閥


- 3/8"-18NPTF母接頭。
- 可控制油壓缸速度。
- 亦可當作暫時維持的關閉閥。

3/8"-18NPTF

Needle Valve

※3/8"-18NPTF female ports. **To control cylinder speed. ※Also be used as shut-off valve for temporary load holding.

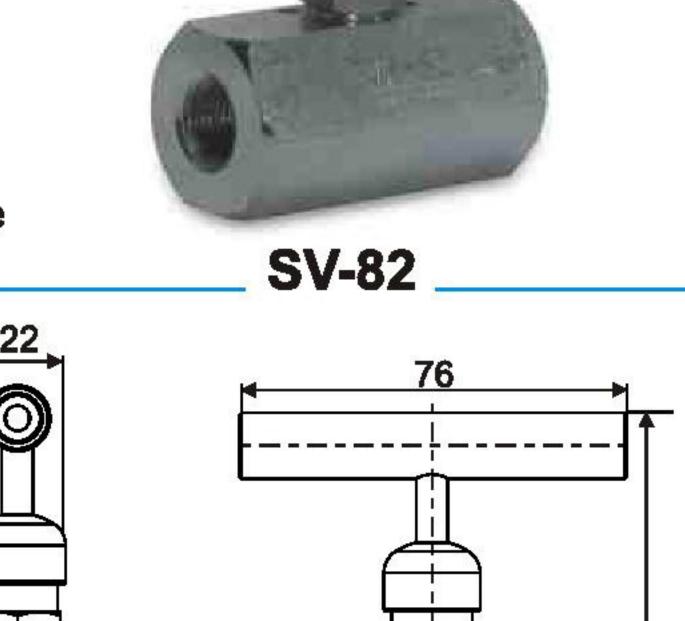

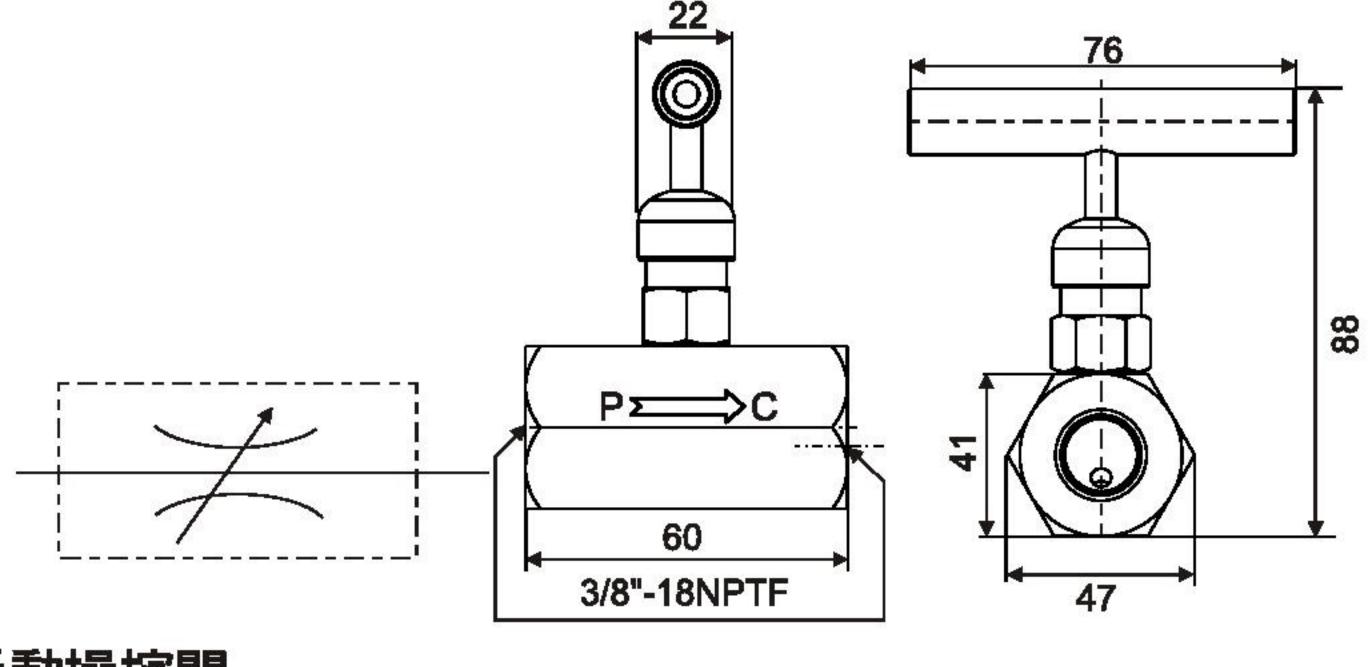

手動操控閥

- 》限制當液壓泵浦迴路時產生的壓力,以保護其他零配件。
- 當到達預設壓力的情形下,閥打開。
- ●順時針旋轉手柄,增壓設定。 包含: 1. 3ft. 迴油油管套件
 - 2.3%的重複性
 - 3. 800-10,000 psi 調整範圍



**Limits pressure developed by the pump in hydraulic circuit, thus limiting the force created by other component. Valve opens whenever preset pressure is reached.

3. 800-10,000 psi adjustment range.

※To increase pressure setting, turn handle clockwise. Include: 1. 3 ft. return line hose kit 2. ± 3% repeatability

SV-152

mm-71



SE FERIES

控制閥

型號

- 四口三位。
- 水平鎖定定位。
- 適用於雙動油壓缸及已安裝SV-66-3的單動油壓缸。
- 提供"前進、維持、回復"動作。


Control Valves ¾4-way/3-position.


**Lever operated, detent positioned. ※Application :double-acting cylinders

and single-acting cylinders which be equipped with SV-66-3.

※Provides"advance", "hold"and "return".



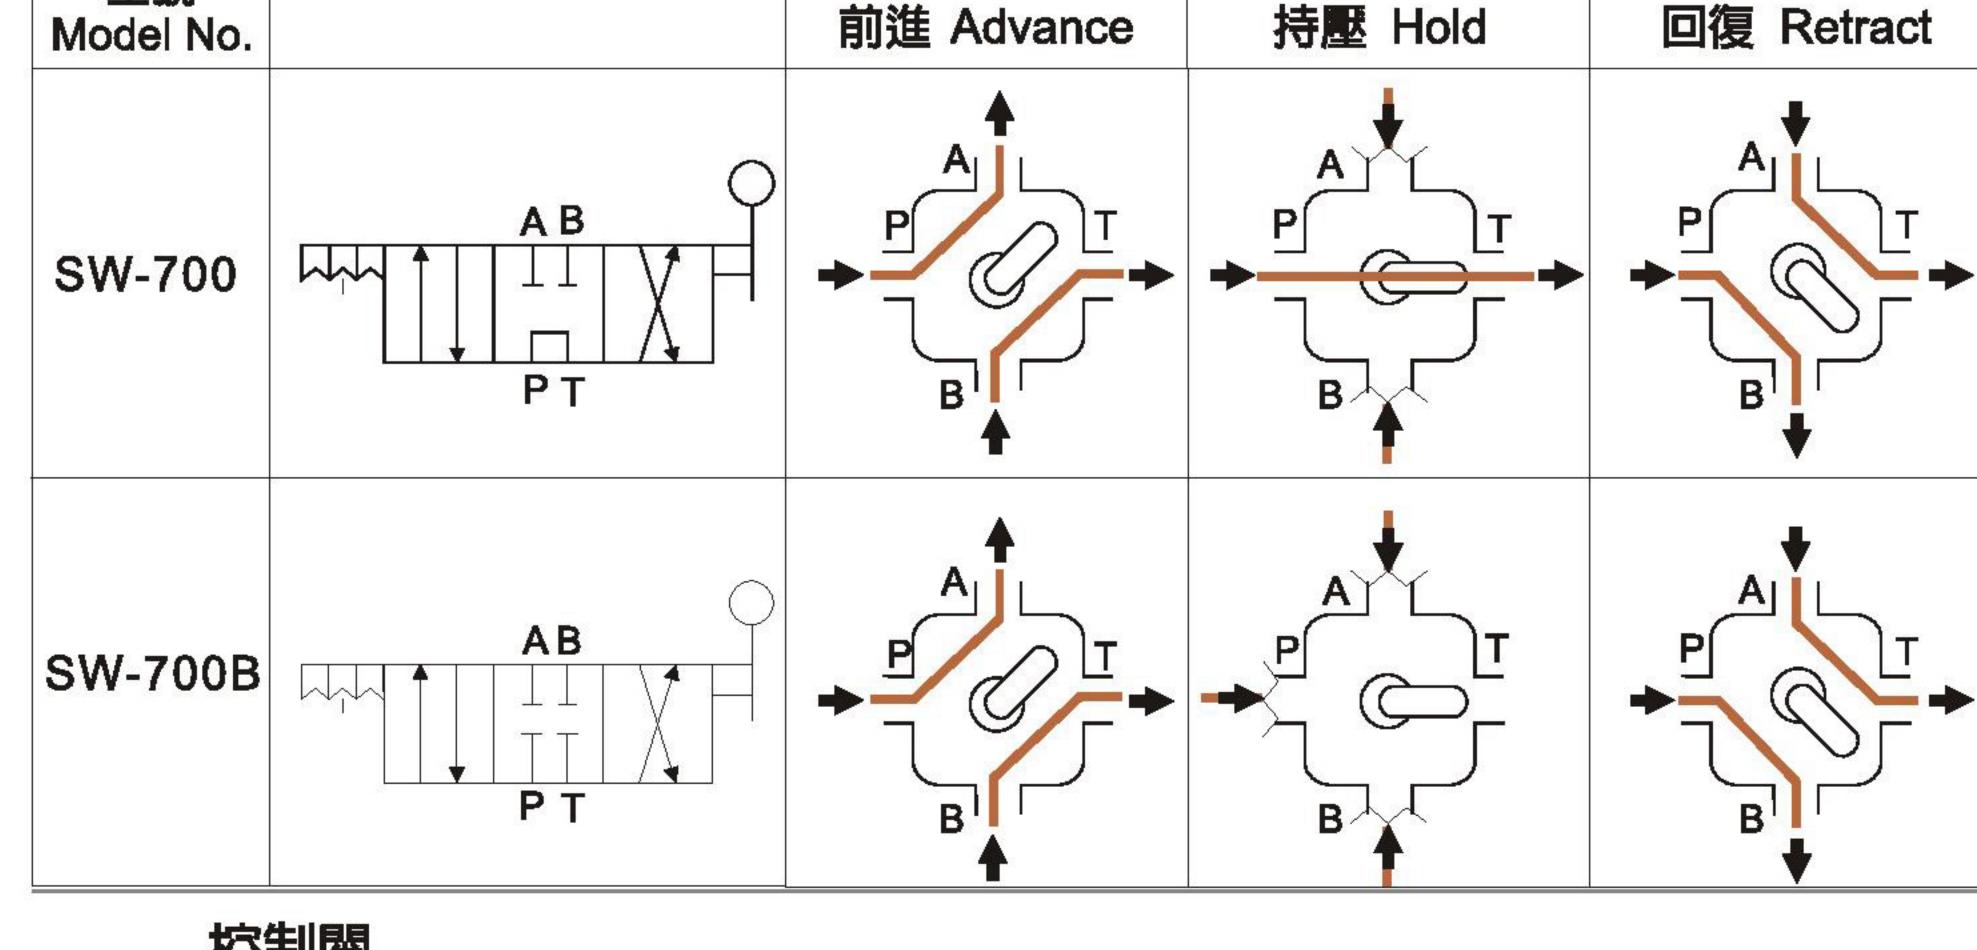

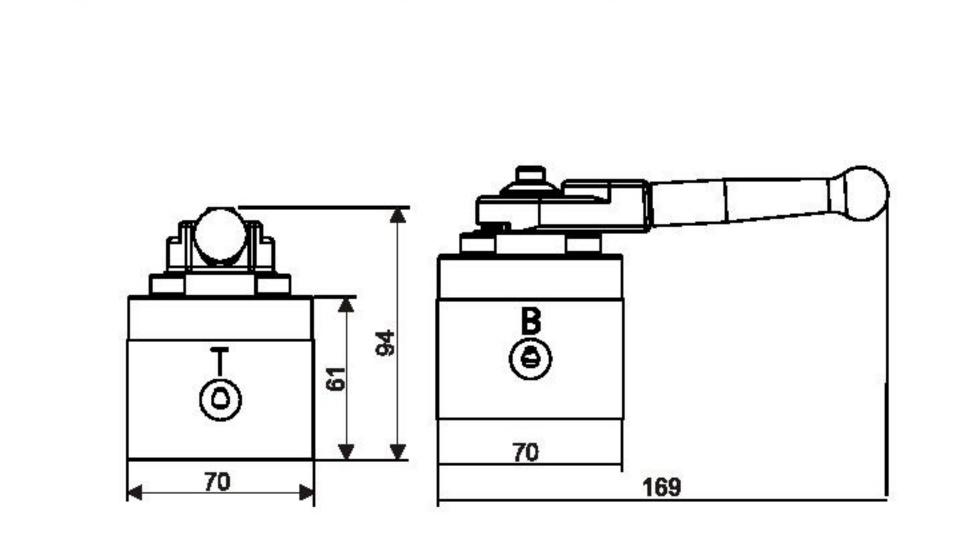


SW-700


控制閥

- 三口二位手動方向閥。 ● 可"前進、回復"動作。
- 可搭配使用單動千斤頂。
- **Control Valves**


※3-way/2-position manual control valve.

*Provides"advance"and "return". ※For use with single-acting cylinder.

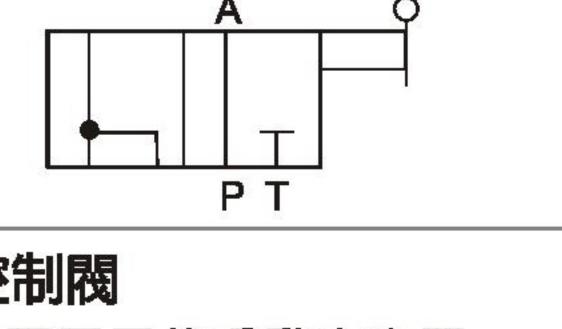

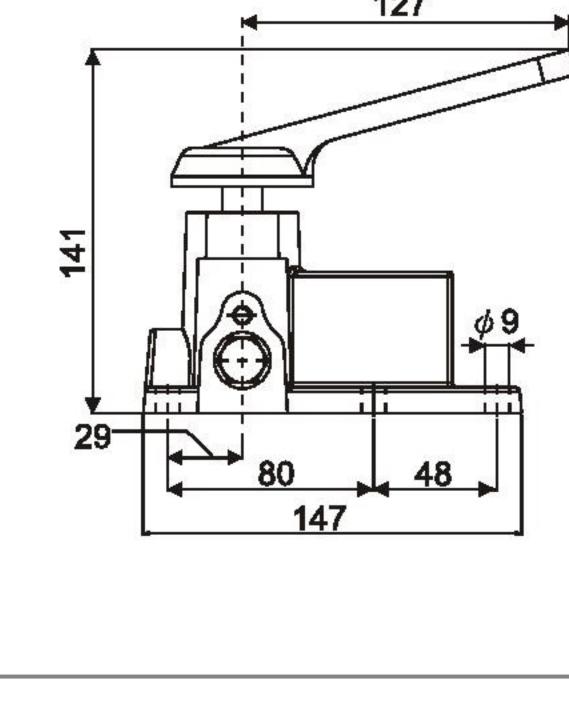

● 可"前進、維持、回復"動作。

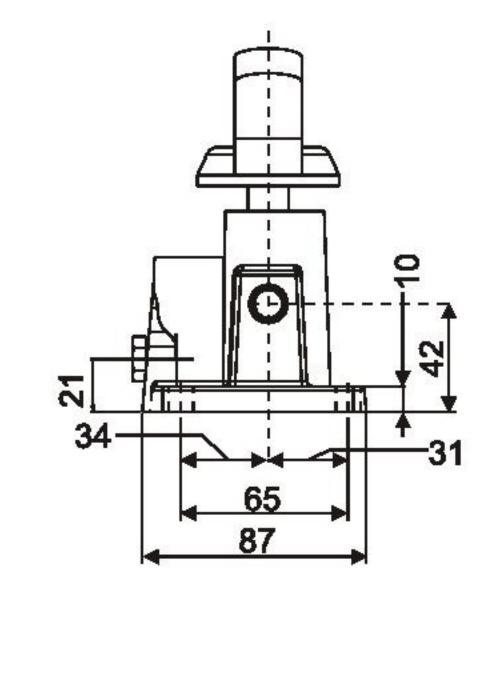





控制閥 四口三位手動方向閥。


- 中立回油,水平鎖定定位。可搭配使用雙動千斤頂或二具單動千斤頂。
- **Control Valves** ¾4-way/3-position manual control valve.

※For use with double-acting or two single-acting cylinder.

※Provides advance ", "hold and "return".

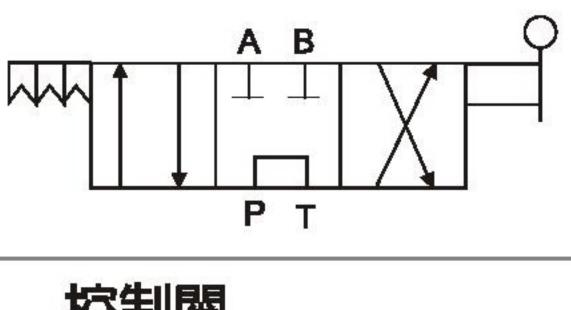

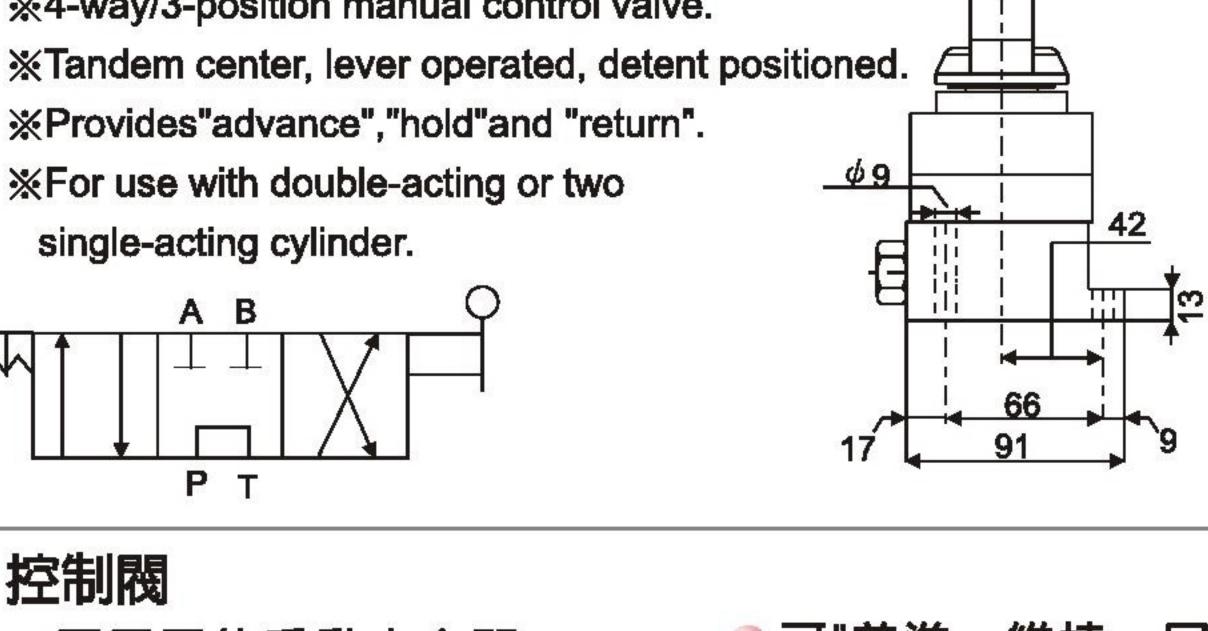

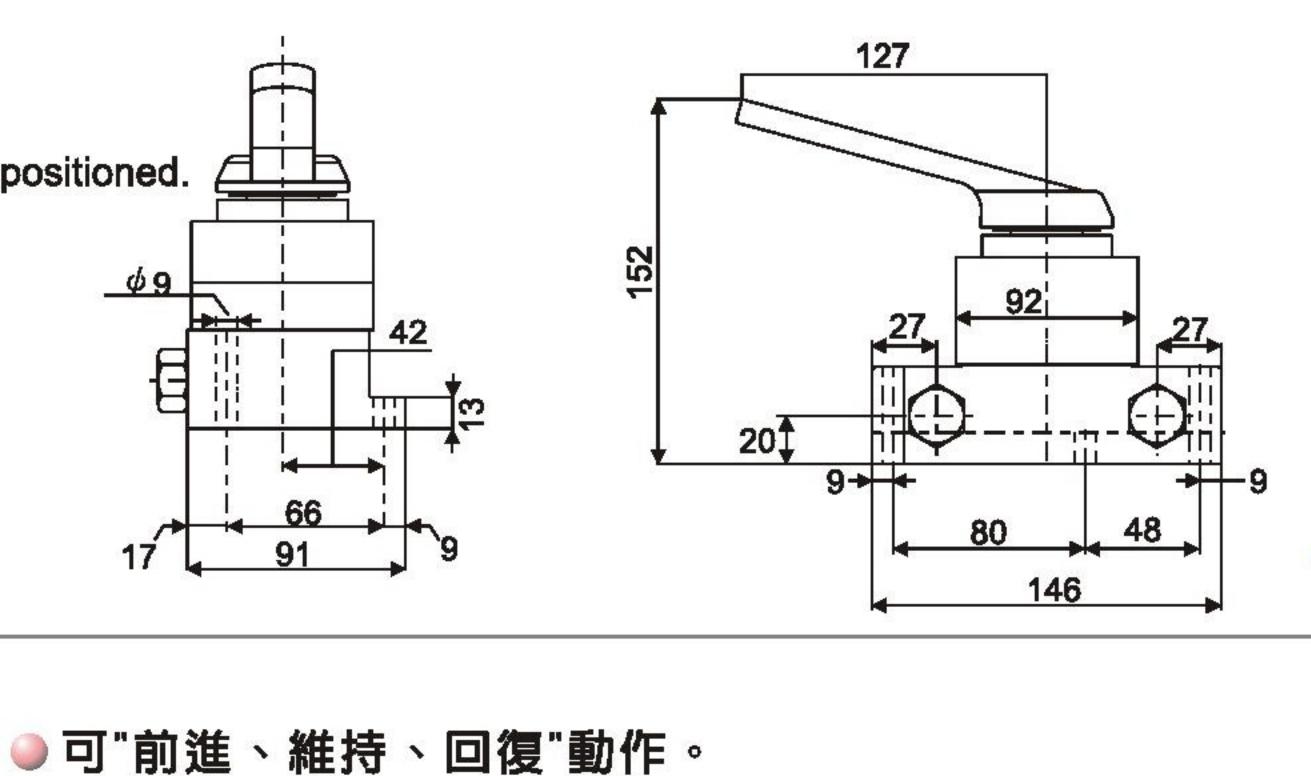



●四口三位手動方向閥。

控制閥

中立回油,水平鎖定定位。

Control Valves

- ¾4-way/3-position manual control valve. **Tandem center, lever operated, detent positioned.
- Provides advance ", "hold and "return". ※For use with double-acting or two
- single-acting cylinder.

