

SPM 一體式液壓拉拔器


- 高強度合金鋼鍛造。
- 四段可摺疊及可移除把手，便於操作。
- 360° 旋轉座。
- 拉拔器本體配有安全閥及紅色警告線。
- 液壓缸硬鉻處理強化線性力。
- 中心螺帽彈簧荷重易於使用。
- 2/3爪頂部套環表面染黑，耐久及防銹。
- 熱處理合金鋼鍛造的連接螺栓及爪表面並染黑處理，以防銹及增加使用壽命。
- 延長桿設計，適用範圍廣。
- 材質永久保固。
- 爪部荷載額定荷載120%以上。
- 各型號均附防護罩及收納工具箱。



SPM-1200

Hydraulic Pullers

- ※ Forge high strength alloy steel.
- ※ Four stages of foldable & removable handle saves the handle force during operation.
- ※ 360° Rotary Socket.
- ※ Puller body is with integral safety valve and red warning line.
- ※ Chrome plated cylinder provides linear force.
- ※ Spring loaded live center nut for easy job (removable).
- ※ 2/3 jaws combination puller cross head with manganous-phosphate plated for rust proof and durability.
- ※ Heat treated forged alloy steel cross bolt & jaws with manganous-phosphate plated for rust proof and long life service.
- ※ Extend plunger easy to work.
- ※ Material lifetime warranty.
- ※ 120% capacity for jaws.
- ※ All model equipment with protective net and box.

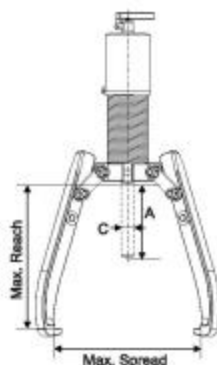

| 型號 Model No. | 能力 Cap. ton (kN) | 揚程 Stroke A(mm) | 受壓面積 Eff. Area (cm ²) | 最大爪深 Max. Reach (mm) | 最大爪距 Max. Spread (mm) | 頂端 Tip (mm) | | | 爪端 Jaw Tip (mm) | | | 重量 Weight (kg) |
|-----------------|------------------------|-----------------------|---|-------------------------------|--------------------------------|-------------------|----|-----|-----------------------|----|----|----------------------|
| | | | | | | B | C | D | A1 | B1 | C1 | |
| SPM-600 | 6 (563) | 70 | 8.04 | 245 | 330 | 45 | 23 | 91 | 13 | 10 | 22 | 6.1 |
| SPM-800 | 8 (793) | 85 | 11.34 | 230 | 350 | 55 | 26 | 112 | 11 | 10 | 25 | 8.4 |
| SPM-1200 | 12 (1011) | 85 | 14.45 | 260 | 375 | 60 | 28 | 118 | 14 | 10 | 29 | 10.5 |
| SPM-2000 | 20 (1978) | 111 | 28.26 | 350 | 520 | 80 | 40 | 162 | 20 | 27 | 33 | 24.5 |
| SPM-3000 | 30 (2940) | 111 | 42.00 | 435 | 550 | 98 | 50 | 155 | 20 | 27 | 38 | 37.3 |

BT 培林拔套


- 高強度合金鋼鍛造。
- 表面鍍鉻、熱處理，防銹增加使用壽命。

Universal Bearing Attachments

- ※ Forged of high strength steel alloy.
- ※ Heat treated, Chrome plated for rust proof and durable life.



| 型號 Model No. | 撐開 Spread (mm) | 螺栓 Bolt (mm) | | 重量 Wt. (kg) |
|-----------------|----------------------|--------------------|------|-------------------|
| | | C | E | |
| BT-9000 | 30-50 | 3/8"-24T-L120mm | 0.6 | |
| BT-9005 | 50-75 | 1/2"-20T-L135mm | 1.5 | |
| BT-9015 | 75-105 | 5/8"-18T-L165mm | 2.5 | |
| BT-9025 | 105-150 | 3/4"-16T-L275mm | 5.2 | |
| BT-9035 | 150-200 | 1"-12T-L350mm | 10.6 | |

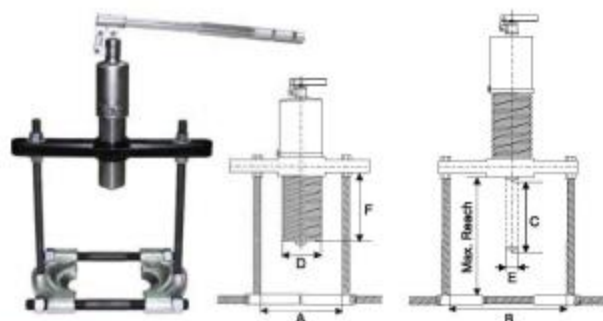

| 型號 Model No. | 能力 Cap. ton (kN) | 揚程 Stroke (mm) | 爪深 Max. Reach (mm) | 爪距 Spread (mm) | | 頂端 Tip (mm) | | | 重量 Wt. (kg) |
|-----------------|------------------------|----------------------|-----------------------------|----------------------|-----|-------------------|----|-----|-------------------|
| | | | | A | B | D | E | F | |
| SPM-610 | 6 (563) | 70 | 270 | 95 | 180 | 45 | 23 | 91 | 7.3 |
| SPM-810 | 8 (793) | 85 | 270 | 95 | 220 | 55 | 26 | 112 | 12.9 |
| SPM-1210 | 12 (1011) | 85 | 381 | 120 | 290 | 60 | 28 | 118 | 21.9 |

適用的
培林拔套
Suitable bear
attachments

SPM 一體式液壓拉拔器-選配 Hydraulic Pullers-Optional



SPM-__00系列
SPM-__00 TYP.



SPM-__10系列
SPM-__10 TYP.



SPM-__30 系列
SPM-__30 Series

選配防護蓋
Opt protect cover

XXSPR-6

XXSPR-8

XXSPR-12



| 整體型號 Model Number | 油缸組 Cylinder Model Number | 爪部拉組 Jaws Assembly Model Number | 培林支撐組 Bearing Assembly Model Number | 壓床支撐組 Press Assembly Model Number |
|----------------------|---------------------------------|---------------------------------------|---|---|
| SPM-600 | SPM-A-600 | SPR6-A-A2 | | |
| SPM-800 | SPM-A-800 | SPR8-A-A2 | | |
| SPM-1200 | SPM-A-1200 | SPR12-A-A2 | | |
| SPM-2000 | SPM-A-2000 | SPR20-A-A2 | | |
| SPM-3000 | SPM-A-3000 | SPR30-A-A2 | | |
| SPM-610 | SPM-A-600 | | SPM-A-620 | |
| SPM-810 | SPM-A-800 | | SPM-A-820 | |
| SPM-1210 | SPM-A-1200 | | SPM-A-1220 | |
| SPM-620 | SPM-A-600 | SPR6-A-A2 | SPM-A-620 | |
| SPM-820 | SPM-A-800 | SPR8-A-A2 | SPM-A-820 | |
| SPM-1220 | SPM-A-1200 | SPR12-A-A2 | SPM-A-1220 | |
| SPM-630 | SPM-A-600 | | | SPM-A-630 |
| SPM-830 | SPM-A-800 | | | SPM-A-830 |
| SPM-1230 | SPM-A-1200 | | | SPM-A-1230 |

選配 Optional

SK3 三角壓盤

Universal Bearing Attachments



| 型號 Model No. | 撐開 Spread (mm) | 螺栓 Bolt (mm) | 重量 Wt. (kg) |
|--------------------|----------------------|--------------------|-------------------|
| | B | C | |
| SK3-50 | φ13.5-50.5 | M10*P1.25-L32mm | 0.5 |
| SK3-100 | φ 26.3-100 | M16*P2 - L64mm | 2.5 |
| SK3-160 | φ 49 - 160 | M22*P2.5-L96mm | 6.1 |

